




# Parking Brake Cable

## Inspection and Replacement

**CAUTION:** The parking brake cables must not be bent or distorted. This will lead to stiff operation and premature cable failure.

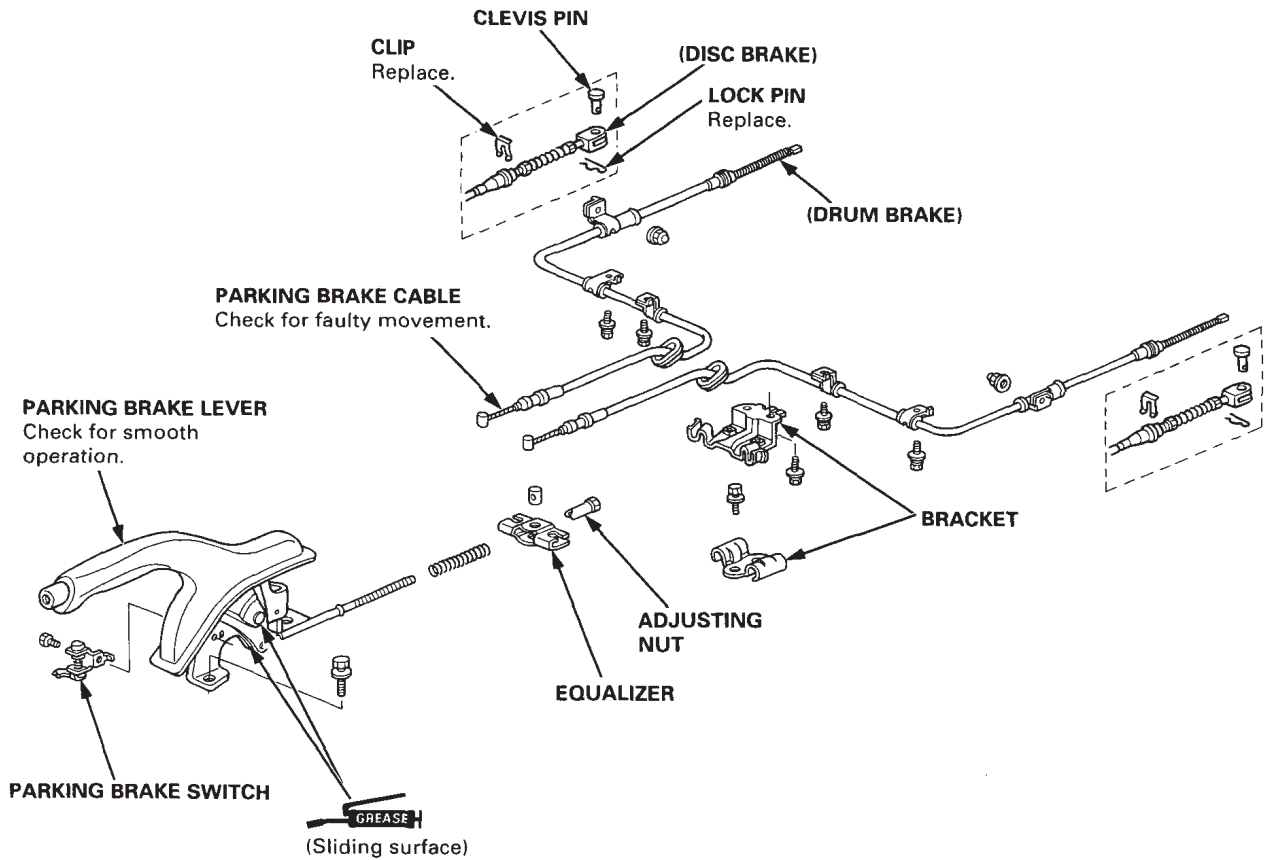

Disconnect the parking brake cable from the lever on the caliper by removing the lock pin and clevis pin, and remove the cable from the arm by removing the clip.

Remove the parking brake cable from the backing plate using a 12 mm offset wrench as shown.

